

Pearl Star Upright Cabinet

Features:


- Designed for 43°C ambient environment (38°C glass door freezer models)
- Adjustable electronic controller with digital temperature display
- High efficiency, long life LED strip lighting (lights are optional on solid door models)
- 100% CFC free polyurethane foam for greater insulation properties and added strength
- Top mounted self contained cabinet
- Auto defrost
- Optimised ducted air flow system
- Waste heat recovery vaporiser
- Large storage capacity
- Four adjustable plastic coated shelves/door
- Triple glazed heated glass door standard on all freezers
- Self closing doors with easy to clean handles
- Hermetique compressor

Pearl Star



Model	PS2	PS3
Capacity	950 litre	1510 litre
Finish: White Colorbond® interior and exterior with stainless steel internal floor*		
Refrigerator Glass Door +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	HPS2GDCB 220/4.8/850	HPS3GDCB 290/5.0/1120
Refrigerator Solid Door +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	HPS2SDCB 220/4.7/580	HPS3SDCB 290/4.9/700
Freezer Glass Door -18°/-22° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	LPS2GDCB 220/9.0/1480	N/A
Freezer Solid Door -18°/-22° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	LPS2SDCB 220/7.3/950	LPS3SDCB 290/8.0/1550
Finish: Stainless Steel interior and exterior*		
Refrigerator Glass Door +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	HPS2GDSS 220/4.8/850	HPS3GDSS 290/5.0/1120
Refrigerator Solid Door +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	HPS2SDSS 220/4.7/580	HPS3SDSS 290/4.9/700
Freezer Glass Door -18°/-22° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	LPS2GDSS 220/9.0/1480	N/A
Freezer Solid Door -18°/-22° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	LPS2SDSS 220/7.3/950	LPS3SDSS 290/8.0/1550

*Refer notes page 15

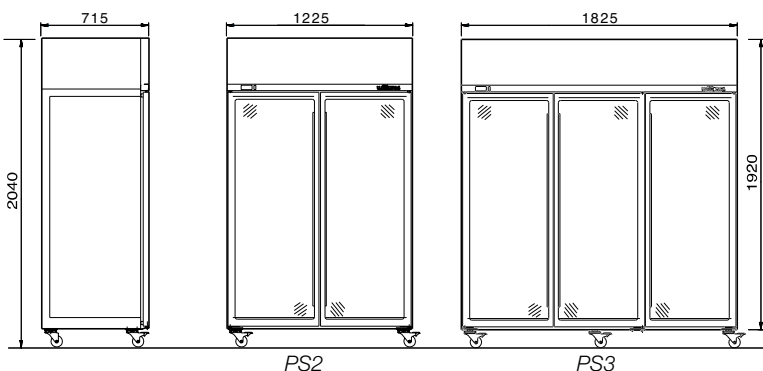

Options (see page 15):



Gas: Self-contained fridge R134a@-5C SST
 Self-contained freezer R404a@-30C SST
 Remote units R404a (others available)
 Electrical lead length 1.5m min. 240V 50Hz
 Heat rejection self-contained units: Fridge 1.4xWr, Freezer 1.6xWr